




Model	Intermittent				Continuous				Configuration	Number of Plungers	Stroke Length (mm)	Pump Weight (Kg)	Plungers dia. (inches)	Connection Sizes	
	Max. Motor Power (HP)	Max. Pressure (PSI)	Max. Flow (m³/hr)	Kerr Max Speed (RPM)	Max. Motor Power (HP)	Max. Pressure (PSI)	Max. Flow (m³/hr)	Kerr Max Speed (RPM)							
Q5450C	301	2051	97	430	277	1800	97	390	Horizontal Quintuplex Plunger	5	114.3	1860	2.625 - 4.5	3" NPT Suction 2" ANSI 1500 RTJ or 2 1/16" API 5000 Discharge Flange	
Q5450HP		5000	32		240	4052	31						1.75 - 2.5	3" NPT Suction 2" ANSI 1500 RTJ or 2 1/16" API 5000 Discharge Flange	
Q5450BCB		9928	12			9806	12						1.125 - 1.5	2" NPT Suction 1 13/16" APJ 6XB Discharge Flange	
Q5450DPT	288	1266	79	375	N/A	N/A	N/A	N/A					3.5 - 4.5	6" NPT Suction 4" NPT Discharge	
KA-3500PT	172	1500	52	385	N/A	N/A	N/A	N/A	Horizontal Triplex Plunger	3	127	864	3.0 - 4.0	5" NPT Suction 3" NPT Discharge	
KA-3500	141	2160	50		102	1743	46	2.25 - 3.5					4" NPT Suction 3" NPT Discharge		
KA-3500HP		6000	18			5647	16	1.25 - 2.0					2" NPT Suction 1 1/4" NPT Discharge		
KA-3500BCB		14406	7			11525	6	0.875 - 1.25					1 1/2" NPT Suction 1 1/4" NPT Discharge		
KT-3400PT	131	1311	45	420	N/A	N/A	N/A	N/A	Horizontal Triplex Plunger	3	101.6	545	3.0 - 4.0	3" NPT Suction 2" NPT Discharge	
KT-3400	106	2160	35		79	1927	32	2.0 - 3.0					3" NPT Suction 2" NPT Discharge		
KT-3400XP		3600	16			3426	18	1.5 - 2.25					3" NPT Suction 1 1/2" NPT Discharge		
KT-3400HP		6000	12			6000	11	1.0 - 1.75					2" NPT Suction 1 1/4" NPT Discharge		
KT-3400BCB		12587	6			10070	6	0.875 - 1.25					1 1/2" NPT Suction 1 1/4" NPT Discharge		
KT-3550PT	117	1311	45	430	N/A	N/A	N/A	N/A	Horizontal Triplex Plunger	3	89	545	3.0 - 4.0	3" NPT Suction 2" NPT Discharge	
KT-3350	96	2160	31		71	1927	29	2.0 - 3.0					3" NPT Suction 2" NPT Discharge		
KT-3350XP		3600	16			3426	16	1.5 - 2.25					3" NPT Suction 1 1/2" NPT Discharge		
KT-3350HP		6000	11			6000	10	1.0 - 1.75					2" NPT Suction 1 1/4" NPT Discharge		
KT-3350BCB		12587	5			10070	5	0.875 - 1.25					1 1/2" NPT Suction 1 1/4" NPT Discharge		
KP-3300PT	78	1469	25	470	N/A	N/A	N/A	N/A	Horizontal Triplex Plunger	3	63.5	455	2.5 - 3.0	3" NPT Suction 2" NPT Discharge	
KP-3300BC	76	3600	17		57	3600	16	1.25 - 2.5					3" NPT Suction 2" NPT Discharge		
KP-3300HP		5246	13			6000	12	1.0 - 2.0			2" NPT Suction 1 1/4" NPT Discharge				
KP-3300BCB		10706	7			8564	5	0.875 - 1.25			1 1/2" NPT Suction 1 1/4" NPT Discharge				
KM-3300PT	47	2251	17	470	N/A	N/A	N/A	N/A	Horizontal Triplex Plunger	3	76.2	155	1.5 - 2.25	2" NPT Suction 1 1/4" NPT Discharge	
KM-3300SHPT		2251	17		N/A	N/A	N/A	N/A					1.5 - 2.25	2 1/2" NPT Suction 1 1/4" NPT Discharge	
KM-3300BC		39	2648		13	N/A	N/A	N/A					N/A	1.25 - 2.0	2" NPT Suction 1 1/4" NPT Discharge
KM-3300BCB			10593		5	N/A	N/A	N/A					N/A	0.625 - 1.25	1 1/4" NPT Suction 1" NPT Discharge
KM-3250SHPT	43	2251	15	510	N/A	N/A	N/A	N/A	Horizontal Triplex Plunger	3	63.5	155	1.5 - 2.25	2 1/2" NPT Suction 1 1/4" NPT Discharge	
KM-3250PT		2251	15		N/A	N/A	N/A	N/A					1.5 - 2.25	2" NPT Suction 1 1/4" NPT Discharge	
KM-3250BC		35	2648		12	25	3310	11			1.0 - 2.0	2" NPT Suction 1 1/4" NPT Discharge			
KM-3250BCB			10593		5		8475	4			0.625 - 1.25	1 1/4" NPT Suction 1" NPT Discharge			
KJ-2250BC	22	2648	7	430	16	3310	6	390	Horizontal Duplex Plunger	2	63.5	105	1.0 - 2.0	2" NPT Suction 1 1/4" NPT Discharge	
KJ-2250BCB		10593	2		N/A	N/A	N/A	N/A					0.625 - 1.25	1 1/4" NPT Suction 1" NPT Discharge	
KZ-3150PT	17	1595	7	575	N/A	N/A	N/A	N/A	Horizontal Triplex Plunger	3	38.1	80	1.5 - 1.875	1 1/2" NPT Suction 3/4" NPT Discharge	
KZ-3150		4950	5		12	3960	4	0.75 - 1.5					1 1/4" NPT Suction 3/4" NPT Discharge		
KD-1250BC	11	2648	3	375	8	3310	3	340	Horizontal Simplex Plunger	1	63.5	91	1.0 - 2.0	2" NPT Suction 1 1/4" NPT Discharge	
KD-1250BCB		10593	1		N/A	N/A	N/A	N/A					0.625 - 1.25	1 1/4" NPT Suction 1" NPT Discharge	

Model	Intermittent				Continuous				Number of Plungers	Stroke Length (mm)	Pump Weight (Kg)	Plungers dia. (inches)	Connection Sizes	
	Max. Motor Power (HP)	Max. Pressure (PSI)	Max. Flow (m ³ /hr)	Kerr Max Speed (RPM)	Max. Motor Power (HP)	Max. Pressure (PSI)	Max. Flow (m ³ /hr)	Kerr Max Speed (RPM)						
T60HD	625	1639	138	275	N/A	N/A	N/A	N/A	3	152	3493	5.75 - 6.0	6" ANSI CL. 150 RF Suction 4" NPT Discharge	
Q45XP	407	5000	32	430	293	4947	31	390	5	114.3	1860	1.75 - 2.5	3" NPT Suction 2" ANSI 1500 RTJ or 2 1/16" API 5000 Discharge Flange	
Q45H		12212	12			11972	12					1.125 - 1.5	2" NPT Suction 1 13/16" APJ 6XB Discharge Flange	
Q45M		2160	97			277	2160					97	2.625 - 4.5	6" NPT Suction 3" NPT Discharge
Q45PT	355	1558	79	375	N/A	N/A	N/A	N/A	5	114.3	1860	3.5 - 4.5	6" NPT Suction 4" NPT Discharge	
T50M	202	2160	50	385	146	2160	46	350	3	127	932	2.25 - 3.5	4" NPT Suction 3" NPT Discharge	
T50XP		6000	16			6000	16					1.25 - 2.0	1 1/2" NPT Suction 1" 1502 Half Union Discharge	
T50H		15000	7			15000	6					0.875 - 1.25	1 1/2" NPT Suction 1" 1502 Half Union Discharge	
T40M	166	2160	35	420	118	2160	32	385	3	101.6	613	2.0 - 3.0	3" NPT Suction 2" NPT Discharge	
T40XP		6000	12			6000	11					1.0 - 1.75	2" NPT Suction 1 1/4" NPT Discharge	
T40H		15000	6			15000	6					0.875 - 1.25	1 1/2" NPT Suction 1" 1502 Half Union Discharge	
T35M	145	2160	31	430	80	2160	29	400	3	89	613	2.0 - 3.0	3" NPT Suction 2" NPT Discharge	
T35XP		6000	11			6000	10					1.0 - 1.75	2" NPT Suction 1 1/4" NPT Discharge	
T35H		15000	5			15000	5					0.875 - 1.25	1 1/2" NPT Suction 1" 1502 Half Union Discharge	
T30H	107	15000	7	470	68	10221	5	435	3	76.2	455	0.875 - 1.25	1 1/2" NPT Suction 1" 1502 Half Union Discharge	
T30M	91	3600	17			3600	16					1.25 - 2.5	3" NPT Suction 2" NPT Discharge	
T30XP	91	6000	13			6000	12					1.0 - 2.0	2" NPT Suction 1 1/4" NPT Discharge	
T30MM	51	3600	13			36	3600					12	1.0 - 2.0	2" NPT Suction 1 1/4" NPT Discharge
T30MH	51	13977	5				10593					5	0.625 - 1.25	1 1/2" NPT Suction 1" 1502 Half Union Discharge
T25M	46	3600	12				510					32	3600	11
T25H		13977	5	10593	4	0.625 - 1.25		1 1/4" NPT Suction 2" Half Union Discharge						

Model	Max. Motor Power (HP)	Max. Pressure (PSI)	Max. Flow (m ³ /hr)	Kerr Max Speed (RPM)	Configuration	Number of Plungers	Stroke Length (mm)	Pump Weight (Kg)	Plungers dia. (inches)	Connection Sizes
TWS2500HD	2500	17905	258	330	Horizontal Triplex Plunger	3	203	5625	4.0 - 6.0	6" Victaulic Groove Suction 2" FIG 1502 Fem Discharge
QWS2500HD	2500	17905	431	330	Horizontal Quintuplex Plunger	5	203	8549	4.0 - 6.5	6" Victaulic Groove Suction 2" FIG 1502 Fem Discharge
QWS1000S	1000	15000	211	450	Horizontal Quintuplex Plunger	5	152	3220	2.75 - 4.5	6" Victaulic Suction 3" NPT Discharge
T60WS	1000	12000	106	375	Horizontal Triplex Plunger	3	152	2449	3.0 - 4.5	6" ANSI CL. ISO RF 2" FIG 1502 FEM
TWS600S	600	16832	127	450	Horizontal Triplex Plunger	3	152	2210	2.75 - 4.5	6" Victaulic Groove Suction 2" FIG 1502 Fem Discharge

Q/K/T series performance

Intermitente

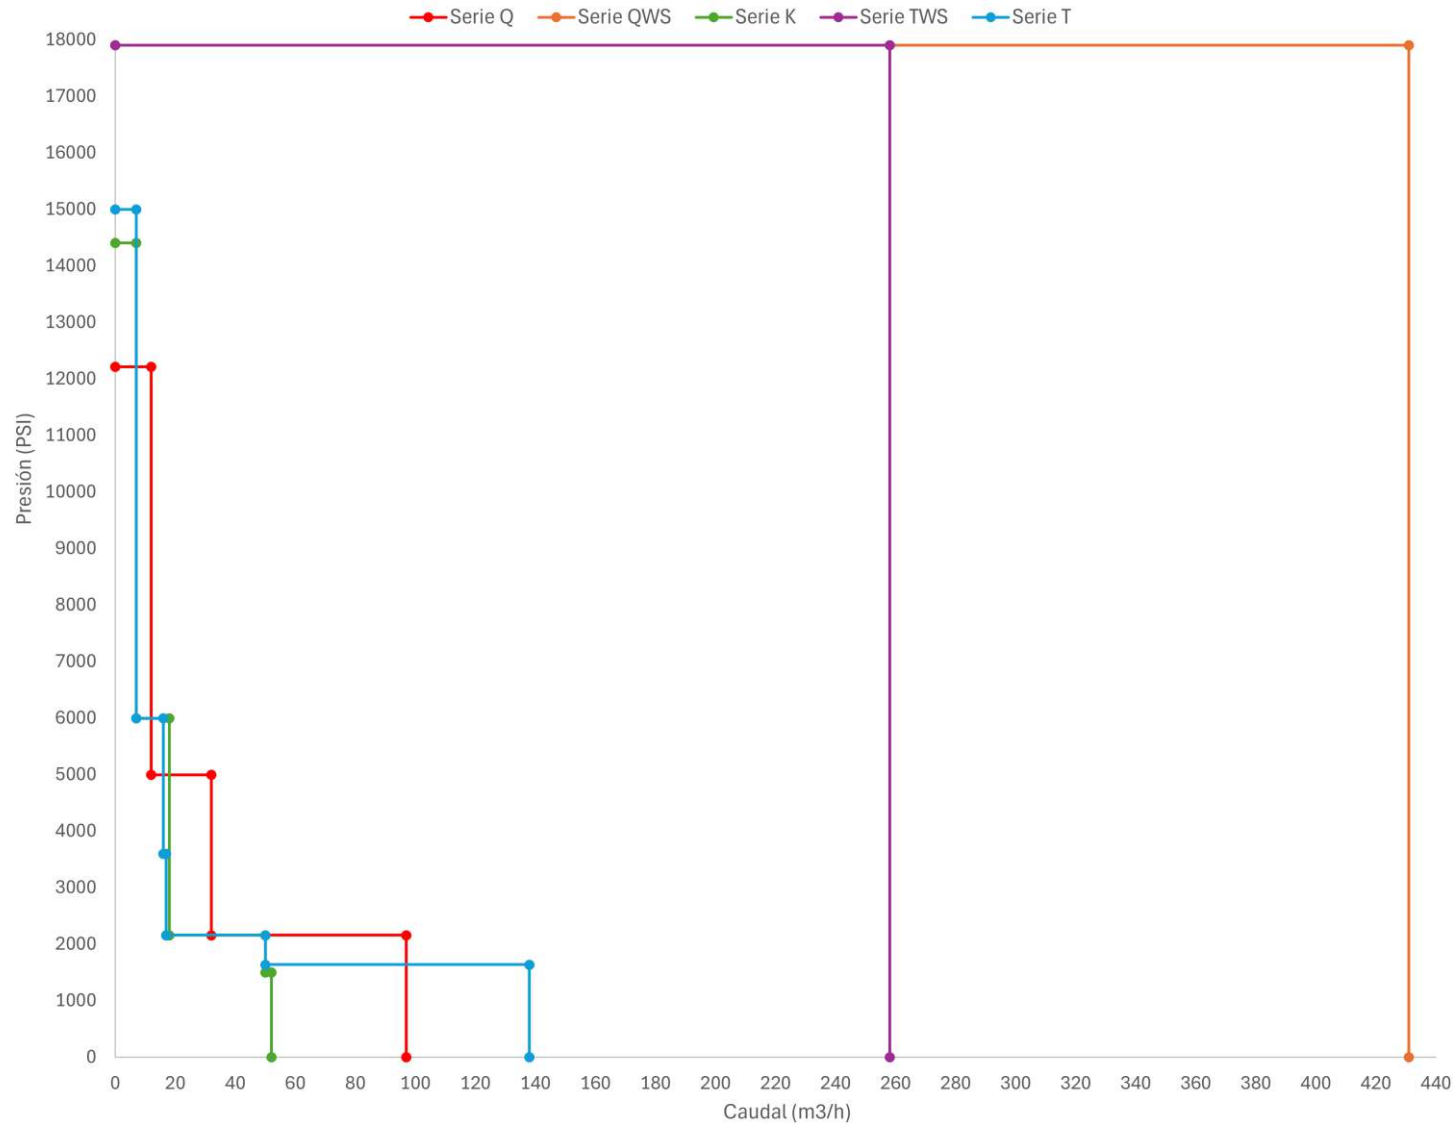

Q/K/T series performance

Continuo

